

HFU-2020AN

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Toray's PVDF membrane construction is highly resistant to chlorine and strong acids, which allows for better cleaning and optimization of filtration flux rates after cleaning. The hollow fiber modules effectively remove suspended solids, viruses, and bacteria and are certified for drinking water applications.



| Membrane Characteristics | Unit | Value |
|---|-----------------------------------|--------------------------------|
| Membrane Material | | PVDF (Polyvinylidene fluoride) |
| Nominal Pore Size | µm | 0.01 |
| Outer Membrane Surface Area | m ² (ft ²) | 72 (775) |
| Operating Parameters | Unit | Value |
| Maximum Feed water / Filtrate Flow | m ³ /h (gpm) | 12 (53) |
| Maximum Backwash Flow | m ³ /h (gpm) | 13.5 (59) |
| Maximum Air Flow | Nm ³ /h (scfm) | 9.0 (5.3) |
| Maximum Inlet Pressure | kPa (psi) | 300 (43.5) |
| Maximum Backwash Pressure | kPa (psi) | 300 (43.5) |
| Normal Operating Transmembrane Pressure | kPa (psi) | 0–200 (0–29) |
| Operating Temperature Range | °C (°F) | 1–40 (34–104) |
| pH Range | | During Filtration 1–10 |
| | | During Cleaning 0–12 |

*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.

Product Certifications & Compliances

(Please contact Toray for details on the certified modules)

- NSF/ANSI/CAN 61 for drinking water applications
- NSF/ANSI 419 to comply with the U.S. EPA's Long Term 2 Enhanced Surface Water Treatment Rule (LT2ESWTR), which allows membrane manufacturers to prove Cryptosporidium reduction
- Association of Membrane Separation Technology of Japan
- Korea Water and Wastewater Works Association



Applications


Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Secondary and Tertiary wastewater

HFU-2020AN

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

| Dimensions and Weight | Unit | Value |
|-------------------------|-------------------------|---------------|
| Diameter | mm (in) | 216 (8.5) |
| Length | mm (ft) | 2,160 (7.087) |
| Weight | kg (lbs) | 92 (203) |
| | kg (lbs) | 49 (108) |
| Connections | Value | |
| (1) Filtrate / Backwash | Housing type joint, 80A | |
| (2) Air Out | Housing type joint, 65A | |
| (3) Feed Drain / Air In | Housing type joint, 80A | |
| Material Composition | | |
| Casing | uPVC | |
| Cap | uPVC | |
| Potting | Epoxy resin | |
| O-ring | EPDM | |

Please contact Toray for more detailed drawing and dimensions.

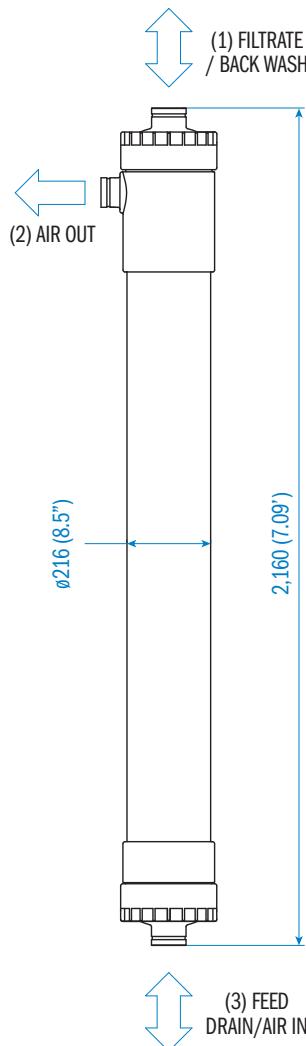

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

Headquarters
Japan +81 3 3245 4542

Asia Pacific
China (TBMC) +86 10 8048 5216
Singapore (TAS) +65 6226 0525
Korea (TAK) +82 2 3279 7365

Americas (TMUS)
USA +1 (858) 218 2360

Europe & Sub-Saharan Africa (TMEU)

Switzerland +41 61 415 8710
Middle East (TMME)
Saudi Arabia +966 13 568 0091
U.A.E. +971 4 392 8811

©2023 Toray Industries, Inc.

 LinkedIn  YouTube

For more info, please visit
water.toray